

ROMECO

SOLUCIONES PARA TUS PROYECTOS



PAVIMENTADORA DE RODILLO

Allen TRTP265



The new 265 is the perfect combination of both the 275 and 255 trtp models. A vibration rack similar to the 275 is included with this machine. The operator console and controls have been moved to the end of the frame for a lightweight paver option without compromising the strength and performance.

SPECIFICATIONS



DESCRIPTION	TRTP265
ENGINE	Hatz 4H50TIC (T4F)
HORSEPOWER CLASS	74 hp (55.2 kW)
FUEL TYPE	Liquid-Cooled Diesel
WIDTHS AVAILABLE (2 FT INCREMENTS)	12 - 34 ft (3.7 - 10.4 m)
WEIGHT AT 22 FT	8,700 lb (3,946 kg)
ROLLER TUBE DIAMETER	10 in (25.4 cm)
TUBE WEIGHT PER FT	27 lb (12 kg)
HYDRAULIC OIL RESERVOIR	30 gal (114 L)
HYDRAULIC SPRAY SYSTEM	Standard
HYDRAULIC STEERING LEG	Standard
VIBRATOR DEPTH	24" Below Grade
VIBRATOR FREQUENCY	11,000 vpm



*Please note: The TRTP will need to be at least 2' wider than the paving width. Example: 16' Paving with = 18' TRTP Length.

STEEL EDGE FORMS AND ACCESSORIES


Allen offers a complete line of steel edge forms, including straight forms, radius, dual-sided and heavy-duty paving forms (dowel holes upon request).

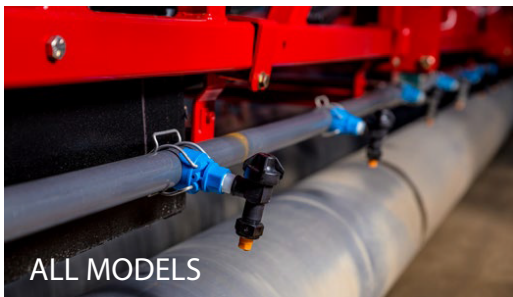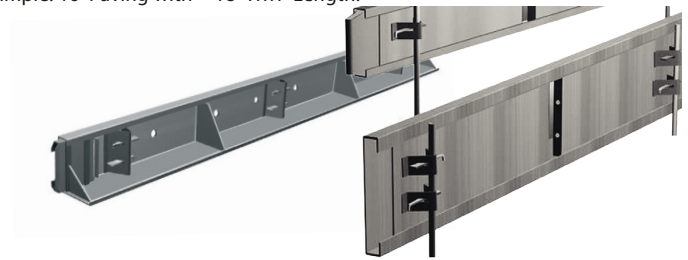

ALL MODELS

SPRAY SYSTEM

Allows fogging of screeding tube to keep concrete from sticking to the tube. Fog bar is made with QD couplings for ease of assembly for machine reconfiguration. Available on all models.

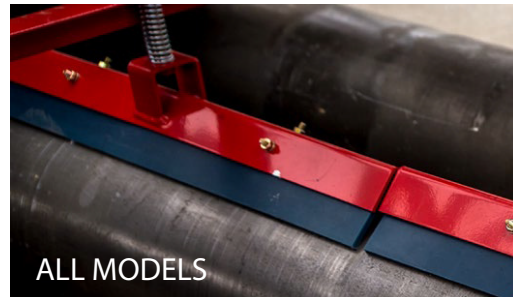

ALL MODELS

TUBE SCRAPERS

Drive tube scrapers prevent build-up on tubes allowing for easier clean-up at the end of the day. Available on all models.