


ROMECO

SOLUCIONES PARA TUS PROYECTOS

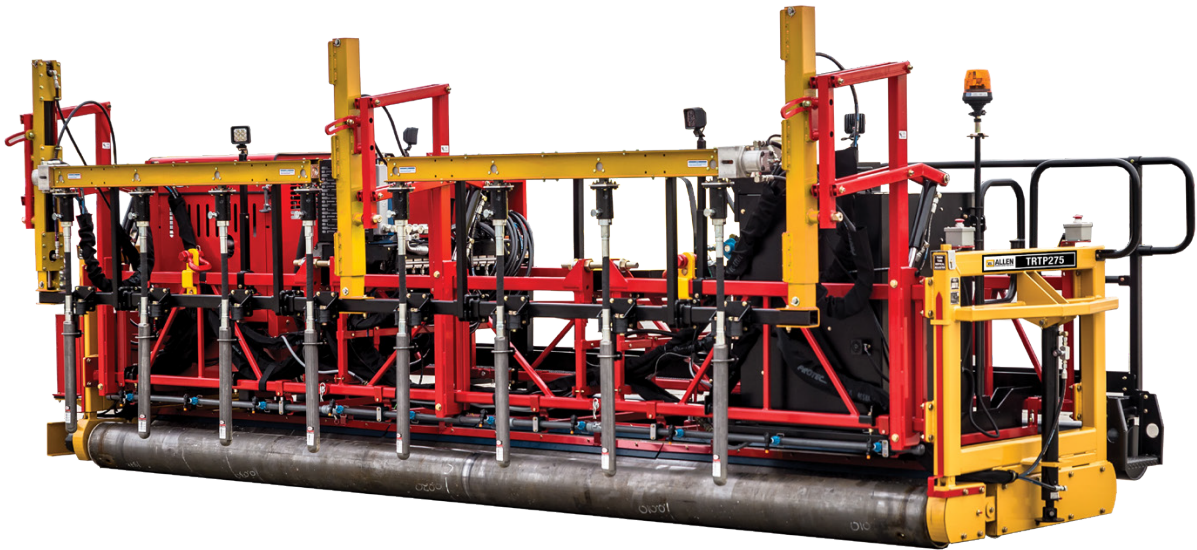

PAVIMENTADORA DE RODILLO

Allen TRTP275



The largest of the TRTP's that Allen manufactures, the 275 comes equipped with a gang vibration system to consolidate the concrete to meet any roadway or airport project specification. This work horse comes equipped with a high powered 74hp Hatz diesel engine and an operator console in the frame of the machine for visibility and safety purposes.

SPECIFICATIONS

DESCRIPTION	TRTP275
ENGINE	Hatz 4H50TIC (T4F)
HORSEPOWER CLASS	74 hp (55.2 kW)
FUEL TYPE	Liquid-Cooled Diesel
WIDTHS AVAILABLE (2 FT INCREMENTS)	12 - 34 ft (3.7 - 10.4 m)
WEIGHT AT 22 FT	8,700 lb (3,946 kg)
ROLLER TUBE DIAMETER	10 in (25.4 cm)
TUBE WEIGHT PER FT	27 lb (12 kg)
HYDRAULIC OIL RESERVOIR	60 gal (227 L)
HYDRAULIC SPRAY SYSTEM	Standard
HYDRAULIC STEERING LEG	Standard
VIBRATOR DEPTH	24" Below Grade
VIBRATOR FREQUENCY	11,000 vpm



*Please note: The TRTP will need to be at least 2' wider than the paving width. Example: 16' Paving with = 18' TRTP Length.

STEEL EDGE FORMS AND ACCESSORIES

Allen offers a complete line of steel edge forms, including straight forms, radius, dual-sided and heavy-duty paving forms (dowel holes upon request).

